


298.00 EUR  
 incl. 19% VAT, plus [shipping](#)

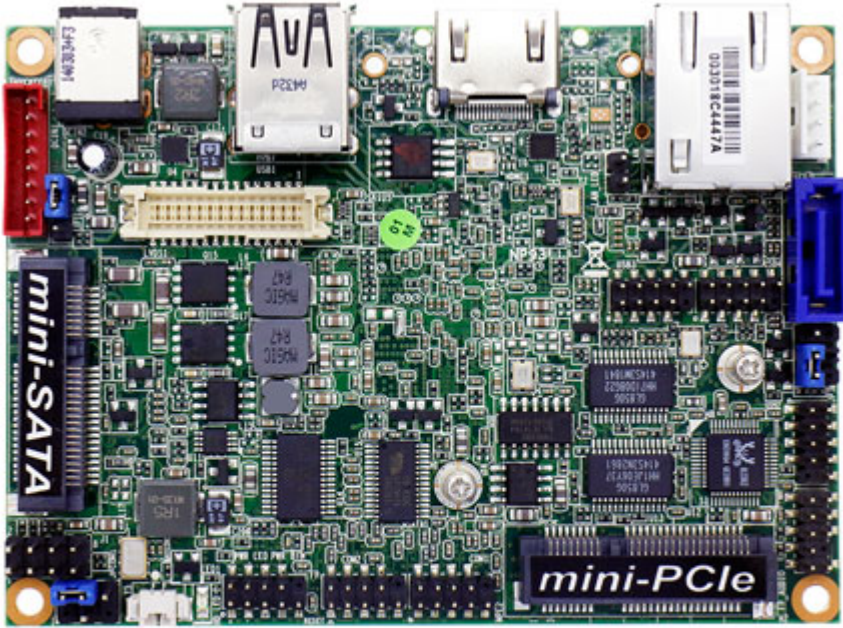

- Intel® Bay Trail N2930 (QC, 1.83G)
- DDR3 on board 2GB
- Support 1 \* Serial ATAII (3Gb/s) Device
- Integrated Realtek ALC662 HD Audio CODEC with 4-CH
- 1 \* 24 bits Dual Channel LVDS header
- Support HDMI Output
- Supports 1 \* Realtek RT8111G Gigabit LAN
- 100 x 72 mm Pico Form Factor

<b>Form Factor</b>	
Dimensions	- Pico (100 X 72 mm)
<b>Processor System</b>	
CPU	- Intel® Celeron® Processor N2930/N2807
Core Number	- by CPU
Max Speed	- by CPU
L2 Cache	- by CPU
Chipset	- SoC
BIOS	- UEFI
<b>Expansion Slot</b>	
PCI	- 0
Mini-PCle	- 1 (half size)
mSATA	- 1
PCIe	- 0
CFast Card Socket	- 0
CF Card Socket	- 0
<b>Memory</b>	
Technology	- 1 * DDR3 1333MHz Single CH on board
Max.	- 2GB

Socket	- 0
<b>Graphics</b>	
Controller	- Intel® HD Graphics up to 854 MHz
VRAM	- Shared Memory
VGA	- No
LVDS	- 1 * Onboard 24-bits dual channel connector
HDMI	- 1
DVI-I	- No
DisplayPort	- No
MultiDisplay	- Yes (Dual Display)
<b>Ethernet</b>	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: RTL8111G
Connector	- 1 x RJ 45
<b>SATA</b>	
Max Data Transfer Rate	- 1 * SATAII (3.0Gb/s)
<b>Rear I/O</b>	
VGA	- 0
DVI-I	- 0
HDMI	- 1
DisplayPort	- 0
Ethernet	- 1
USB	- 2 (1 x USB 2.0 + 1 x USB 3.0)
Audio	- 0
Serial	- 0
eSATA	- 0
PS2	- 0
DC-input	- DC in Jack 12V
<b>Internal Connector</b>	
USB	- 6 ( 6 x USB 2.0 via 10pin header )
PS2	- 0
LVDS / inverter	- 1
VGA	- 0
Serial	- 1 (1x RS-232 with 5V/12V selectable header)
SATA	- 1 * SATAII (3.0Gb/s)
mPCIe	- 1 (half size)
Parallel	- 0
mSATA	- 1
CIR	- 0
GPIO 8-bit	- 0
Chassis intrusion	- 0
Audio Header	- 1
<b>Watchdog Timer</b>	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
<b>Power Requirements</b>	
Input PWR	- 12V DC-In Jack
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
<b>Certifications</b>	
Certifications	- CE, FCC, RoHS, REACH
<b>Environment</b>	

Temperature	- Operating: 0■- 60■
	- Storage: -20■- 85■