


519.00 EUR
incl. 19% VAT, plus [shipping](#)

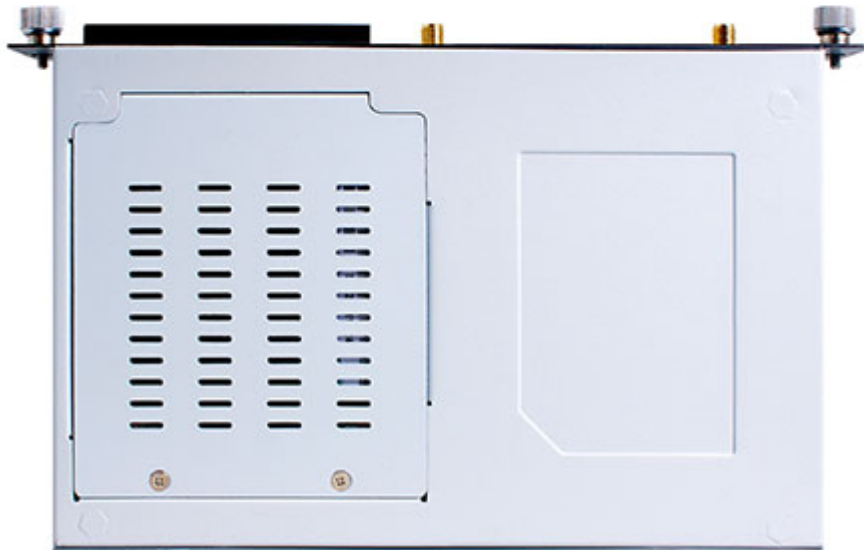

Support:  [Specifications](#)

Jetway OPS player complies with Intel Open Pluggable Specification (OPS) aiming to simplify installation, upgrade and maintenance of large scale digital signage applications, shrinks installation from hours to minutes. OPS101 series is well suited for a wide range of digital signage applications in retail, transport, entertainment, education, and more.

Using Intel® Active Management Technology (Intel® AMT) the OPS player can be remotely powered on and off while offering out-of-band system access. Since Intel® AMT allows the OPS player to be remotely accessed and diagnosed, software issues can be repaired wirelessly while failed hardware components can be identified in advance for preventive maintenance, thus lowering maintenance costs and onsite visits.

- Intel® Kaby Lake I5-7200U (2.5GHz) dual-core processor
- Support 2* DDR4 /2400MHz SO-DIMM Max 32GB
- Support 1* M.2 2242 SSD Socket and 1* SATA3 Connector
- Support 1* M.2 1630 or 2230 for WIFI
- Intel® I219LM Gigabit LAN
- 1* JAE 80pin Connector (1* HDMI2.0, 1* USB3.0, 1* USB2.0, 1* TX/RX, 1* Power Button, 1* DC-in)
- 2* USB3.0, 2* USB2.0, 1*HDMI1.4b, 1* Line-Out, MIC, 1* IR
- 12~19V DC-in

| | |
|----------------|---|
| MB Model | - JNC9C-OPS7200 (EPIC Size) |
| Part No | - OPS101-7200 |
| CPU/Chipset | - Intel® Kaby Lake-U i5-7200 2.5GHz Dual core |
| Memory | - 2 * DDR4 SO-DIMM up to 32GB |
| Expansion Slot | - 1 * M.2 2230 connector |
| Storage | - 1 * Serial ATA3 6Gb/s connector - 1 * M.2 2242 connector for SSD |
| Audio | - ALC662 Audio CODEC - HD Audio CODEC |
| Network | - 1 * INTEL® I219LM Chip - 10/100/1000 Base-T Ethernet |
| Rear Panel I/O | - 1 * RJ45 - 1 * HDMI1.4b (Support 4096*2304@24Hz) - 1 * Line-out + MIC - 2 * USB3.0 - 2 * USB2.0 - 1 * IR - 1 * Power Button, 1 * Reset Button - 1 * Power LED, HDD LED - 2 * WIFI Antenna |
| JAE Connector | - 1 * HDMI2.0 (Support 4096*2160@60Hz) - 1 * USB3.0 - 1 * USB2.0 - 1 * RX/TX - 1 * Power Switch - 1 * DC-in |
| Power Source | - DC 12~19V |
| Compliance | - RoHS, ErP Ready |
| Temperature | - Operating Temperature: -10 ~ 60° C - Storage Temperature: -20 ~ 65° C |
| Dimensions | - 202 (W) x 118 (D) x 30 (H) mm |
| OS Support | - Windows 10, Linux |
| Warranty | - 1 Year limited warranty |