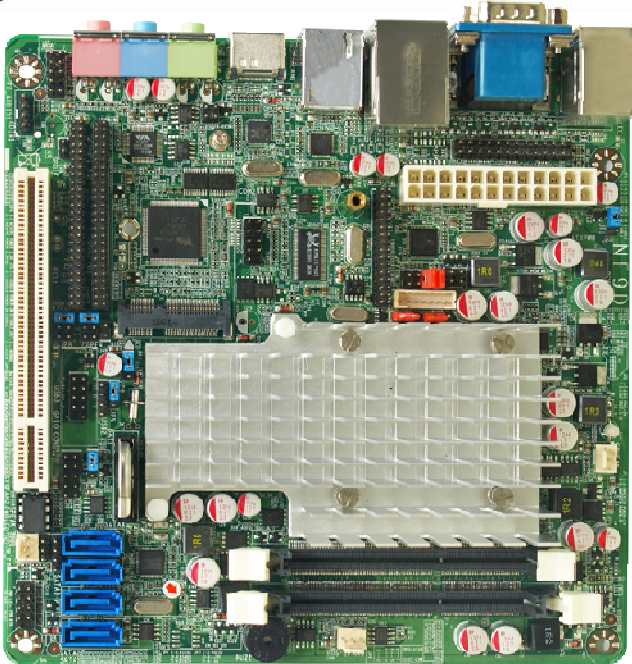
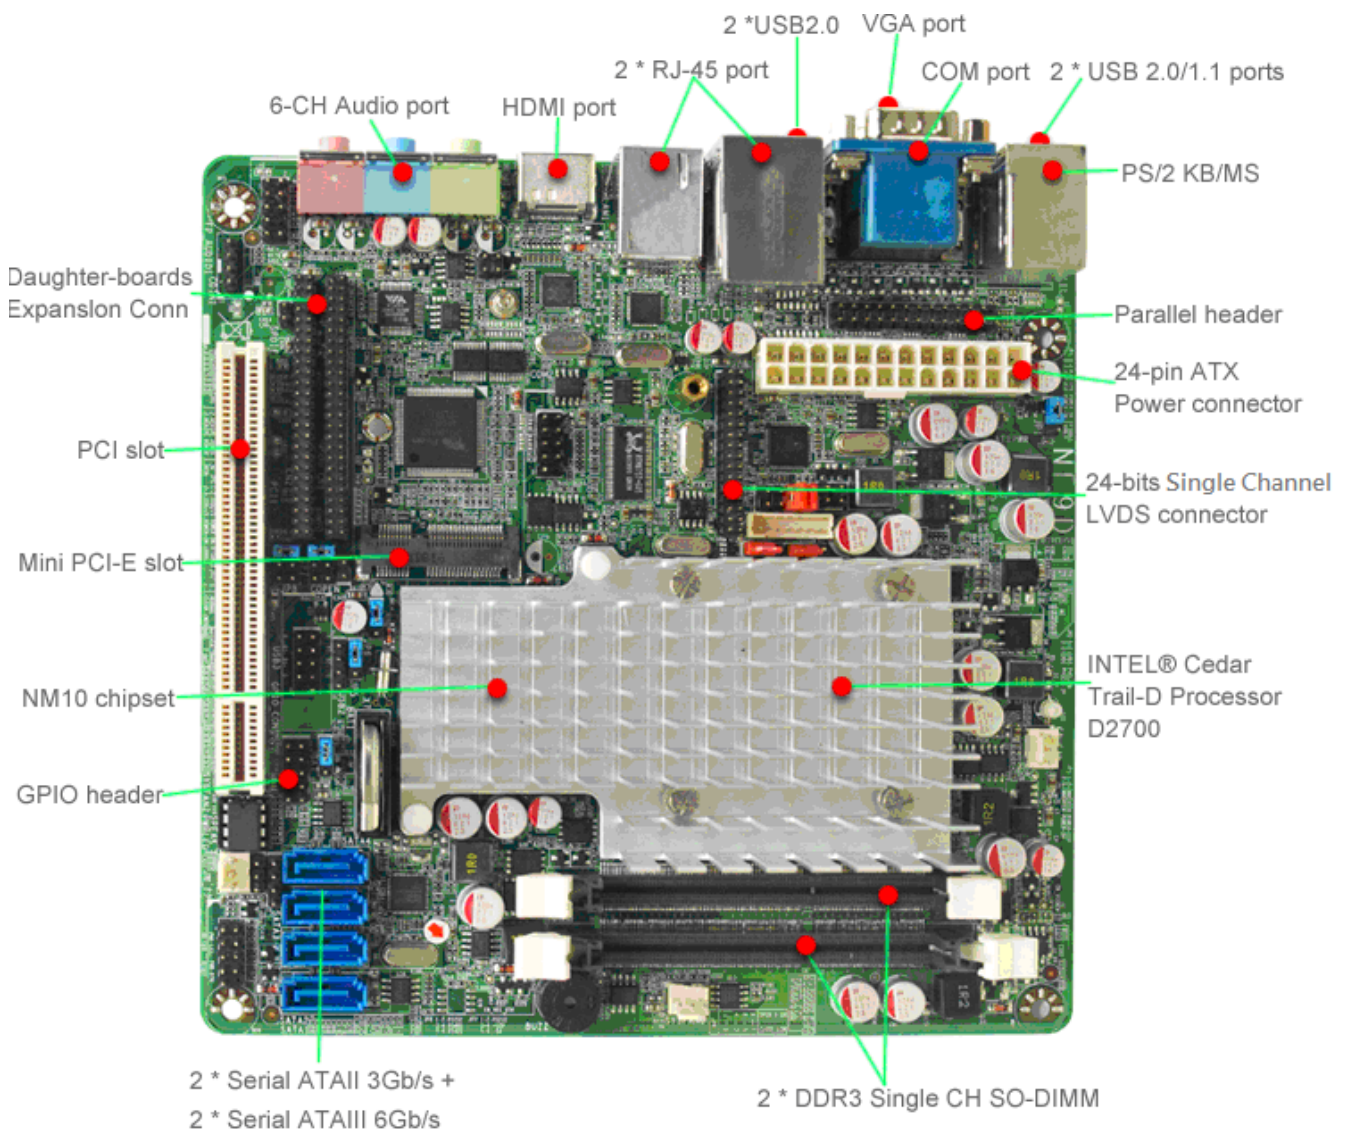


**NF9D-2700**



1. INTEL® Cedar Trail-D Processor D2700 + NM10 Chipset
2. Support 2 \* DDR3 800/1067MHz Single CH up to 4GB
3. Support DirectX 10.1 Graphics up to 640MHz
4. Support 2 \* Serial ATAll (3Gb/s) & 2 \* Serial ATAlll (6Gb/s) Devices
5. Integrated VIA VT1705 HD Audio CODEC with 6-CH
6. Supports Realtek ALC662 6-CH HD Audio CODEC Gigabit LAN
7. 1 \* 24 bits Single Channel LVDS header
8. Support Watch dog Technology
9. Compliance with ERP standard
10. Mini-ITX Form Factor(170mm x 170mm)
11. Support Daughter board Expansion









■ <b>CPU</b>	■ INTEL <sup>®</sup> Cedar Trail-D Processor D2700 CPU (2.13GHz)
■ <b>Chipset</b>	■ INTEL <sup>®</sup> NM10 Express chipset
■ <b>Memory</b>	■ 2 * DDR3 800/1067MHz Single CH up to 4GB
■ <b>Expansion Slots</b>	■ 1 * PCI slot ■ 1 * Mini PCI-E socket
■ <b>Storage</b>	■ 2 * Serial ATAI 3Gb/s + 2 * Serial ATAI 6Gb/s connectors
■ <b>Audio</b>	■ VIA VT1705 HD Audio Code with 6-Channel
■ <b>Ethernet LAN</b>	■ Realtek ALC662 6-CH HD Audio CODEC ■ PCI-E Gigabit Ethernet LAN
■ <b>USB</b>	■ Embedded 7 * USB 2.0/1.1
■ <b>Special Features</b>	■ Support ACPI S3 ■ Support CPU Smart FAN & DC FAN
■ <b>LVDS</b>	■ Onboard 24-bits Single Channel LVDS connector
■ <b>Rear Panel I / O</b>	■ 4 * USB 2.0/1.1 ports ■ 1 * PS/2 KB/MS connector ■ 2 * RJ-45 port ■ 1 * Audio port ( Line-in, MIC and Line-out ) ■ 1 * VGA port ■ 1 * HDMI port ■ 1 * COM port
■ <b>Internal I / O</b>	■ 2 * USB 2.0/1.1 headers for 3 USB 2.0 ports ■ CPU / Chassis Fan connectors ■ 1 * 24-pin ATX Power connector ■ 1 * COM header (for RS-232/422/485) ■ 1 * chassis intrusion header ■ 1 * 2-pin SPDIF out header ■ 1 * Parallel header ■ 1 * GPIO header
■ <b>BIOS</b>	■ AMI 16MB DIP-SPI Flash ROM
■ <b>Functional</b>	■ ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation, Financial Application
■ <b>Packing</b>	■ Color Box Dimension : 200(W) x 200(D) x 70(H)mm ■ Cases Gross Weight : 15.4KGS ■ Cases Net Weight : 10.3KGS ■ 20 PCS / Cases, Case size : 720(L) x 410(W) x 200(H)mm
■ <b>Certificate</b>	■ CE, FCC, RoHS
■ <b>Temperature</b>	■ Operating within 0~60 centigrade ( <b>Suggest to use system FAN</b> ) ■ Storage within -20-85 centigrade
■ <b>Form Factor</b>	■ Mini ITX Form Factor(170mmx170mm)





\*For further information please visit the website at <http://www.jetway.com.tw>







\*The Specification may be changed without further notice.

## Product Accessories

G04-MJW121C-F	G03-NC9C-LF	G02-DVD5-F	G01-SATA-BK-A-F
			
F07-FN4010B1L3-F	G01-COM9-20A-F	F04-	
			

## Expansion Daughter-boards (Optional)

<b>JAD1RTLNG</b>		<b>Specifications:</b>
		1 * Realtek RTL8110SC PCI Gigabit LAN
		<b>Accessories</b>
<b>JAD1RTLANP</b>		<b>Specifications:</b>
		1* Realtek RTL8100C PCI 10/100m LAN
		<b>Accessories</b>
<b>JAD3RTLNG</b>		<b>Specifications:</b>
		3 * Realtek RTL8110SC PCI Gigabit LAN
		<b>Accessories</b>
<b>JAD3RTLANP</b>		<b>Specifications:</b>
		3 * Realtek RTL8100C PCI 10/100m LAN
		<b>Accessories</b>
		<b>IO Shield:</b>

<b>JAD1INLANG</b>		<b>Specifications:</b> Onboard Intel 82541 PI PCI Giga LAN * 1 <b>Accessories</b>
<b>JAD3INLANG</b>		<b>Specifications:</b> Onboard Intel 82541 PI PCI Giga LAN * 3 <b>Accessories</b>
<b>JAD4COMC1</b>		<b>Specifications:</b> COM port * 2 <b>Accessories</b>
<b>JAD4COMCB</b>		<b>Specifications:</b> COM port * 2 <b>Accessories</b>
<b>JADPE4S</b>		<b>Specifications:</b> Support 4 * SATA II 3Gb/s ports <b>Accessories</b>
<b>JADX24LV4C</b>		<b>Specifications:</b> <ol style="list-style-type: none"> <li>Support 18 bit Single CH to 24 bit Dual CH LVDS</li> <li>Support two RS-232 serial ports (External)</li> <li>Support two RS-232/422/485 serial ports (Internal)</li> </ol>